


Once the reformat is complete, you'll receive a notification window. Click OK. The MicroSD card is now ready to install the operating system to the Raspberry Pi. Download the ZIP file of NOOBS onto your system and have it run in the background since it is a large file that will take some time to be installed. The next step in the process is to download Raspberry Pi's home OS called Raspbian that works as a bridge between the computer OS and the Raspberry Pi's hardware. Be cautious about downloading the NOOBS Lite edition.

Double click on the NOOBS file from the Download folder in the Dock folder and open it. Select the first file that is inside the NOOBS folder. Then scroll to the bottom of the page and click Shift+left mouse button on the last file in the NOOBS folder. Drag and drop all the selected NOOBS files into the SD card icon on the desktop. It's not necessary to open the SD card drive just yet.

Setup Code

Drag the NOOBS files to the SD card, right-click on the SD card icon and click on Eject [Card Name]. In order to eject the card from the reader, remove the card reader from your computer. Remove the microSD card from the

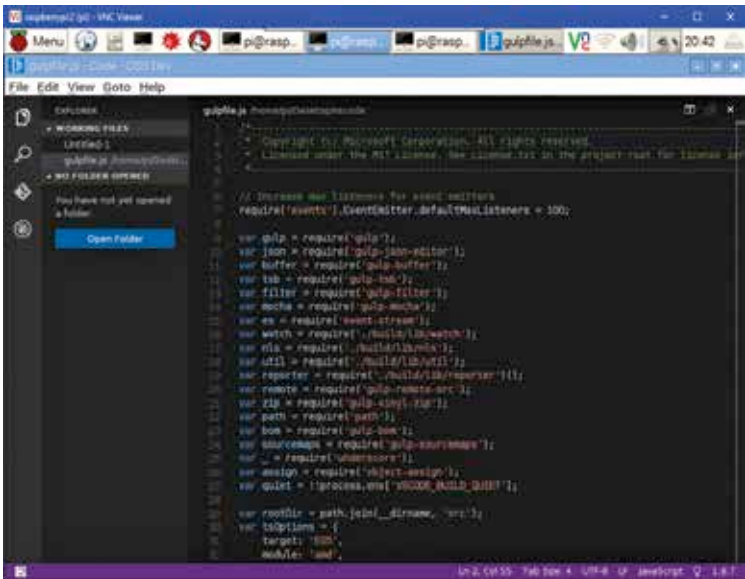

```

// gulpfile.js
// Copyright (c) 2014, Microsoft Corporation. All rights reserved.
// Licensed under the MIT license. See license.txt in the project root for license info.

// Increase max listeners to avoid warnings
require('events').EventEmitter.defaultMaxListeners = 100;

var gulp = require('gulp');
var json = require('gulp-json-editor');
var buffer = require('gulp-buffer');
var tsb = require('gulp-tsb');
var filter = require('gulp-filter');
var mocha = require('gulp-mocha');
var es = require('event-stream');
var watch = require('gulp-watch');
var rimraf = require('rimraf');
var util = require('util');
var reporter = require('gulp-reporter');
var remote = require('gulp-remote');
var zip = require('gulp-zip');
var path = require('path');
var bom = require('gulp-bom');
var sourceMaps = require('gulp-sourcemaps');
var _ = require('underscore');
var assign = require('object-assign');
var quiet = require('gulp-quiet');
var rootDir = path.join(__dirname, '..');
var tsOptions = {
  target: 'ES5',
  module: 'amd',

```