


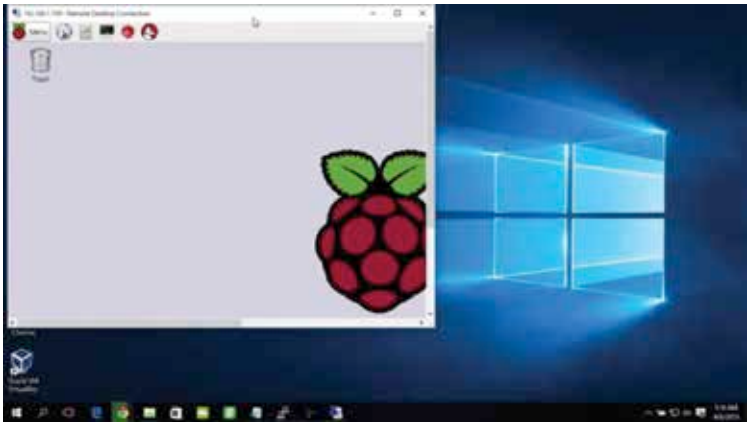

https://www.youtube.com/watch?v=FDdkxPy_Cg

Sample App

```

• int led = D1;
• int boardLed = D7;
•
• // setup() is run only once, it's where we set up GPIO and
  initialise peripherals
• void setup() {
•
•   // Setup GPIO
•   pinMode(led,OUTPUT); // Our LED pin is output (lighting
  up the LED)
•   pinMode(boardLed,OUTPUT); // Our on-board LED is output
  as well
•   digitalWrite(led,LOW);
•   digitalWrite(boardLed,LOW);
•
•   // Subscribe to an event published by IFTTT using Par-
  ticle.subscribe
•   Particle.subscribe("unique_event_name", myHandler);
•   // TODO:
•   // Subscribe will listen for the event unique_event _
  name and, when it finds it, will run the function myHan-
  dler()
•   // (Remember to replace unique_event_name with an
  event name of your own choosing. Make it somewhat compli-
  cated to make sure it's unique.)

```