


CHAPTER #06

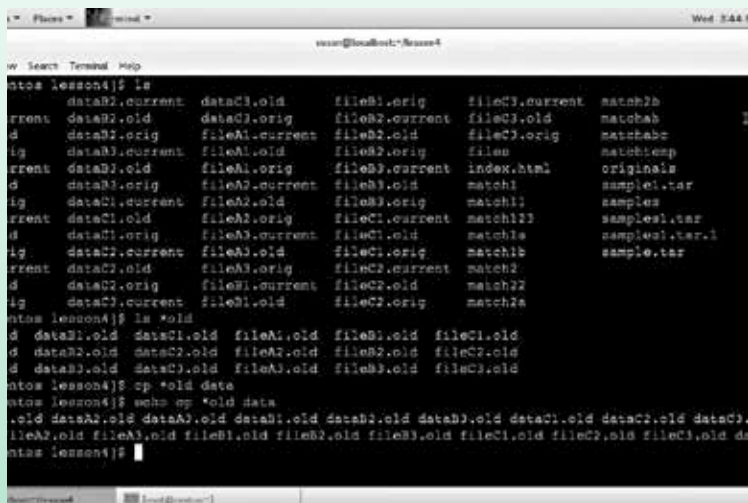

```
ntos lesson4]$ ls
-rw-r--r-- dataB2.current dataC3.old fileB1.orig fileC3.current match2b
-rw-r--r-- dataB2.old dataC3.orig fileB2.current fileC3.old match2b
-rw-r--r-- dataB1.orig fileA1.current fileB2.old fileC3.orig match2b
-rw-r--r-- dataB3.current fileA1.old fileB2.orig fileC3.orig match2b
-rw-r--r-- dataB3.old fileA1.orig fileB3.current index.html original
-rw-r--r-- dataB3.orig fileA2.current fileB3.old match1 sample.tar
-rw-r--r-- dataB1.current fileA2.old fileB3.orig match1 sample
-rw-r--r-- dataC1.old fileA2.orig fileC1.current match1 sample.tar
-rw-r--r-- dataC1.orig fileA3.current fileC1.old match1 sample.tar.1
-rw-r--r-- dataC2.current fileA3.old fileC1.orig match1 sample.tar
-rw-r--r-- dataC2.old fileA3.orig fileC2.current match2
-rw-r--r-- dataC2.orig fileB1.current fileC2.old match2
-rw-r--r-- dataC3.current fileB1.old fileC2.orig match2

ntos lesson4]$ ls *old
-rw-r--r-- dataB1.old dataC1.old fileA1.old fileB1.old fileC1.old
-rw-r--r-- dataB2.old dataC2.old fileA2.old fileB2.old fileC2.old
-rw-r--r-- dataB3.old dataC3.old fileA3.old fileB3.old fileC3.old

ntos lesson4]$ cp *old data
ntos lesson4]$ echo cp *old data
cp: *old data: No such file or directory

ntos lesson4]$ echo cp fileA2.old dataB1.old dataB3.old dataC1.old dataC2.old dataC3.
old dataA2.old dataA3.old dataB1.old dataB2.old dataB3.old dataC1.old dataC2.old dataC3.
old dataA2.old fileA1.old fileB1.old fileB2.old fileB3.old fileC1.old fileC2.old fileC3.old da
ntos lesson4]$
```

Expansion in Linux

Learn about the various different types of expansions Linux has to offer

While working in Linux you may be stuck in a situation where the file contains lots of tabs but the performance of any action mandates not tabs but spaces. Expansion in Linux refers to the preprocessing of the character files so that doubt can resonate with input and those characters can be easily expanded to the space characters.

Listed below are the various facets of expansion in Linux –

Pathname expansion – Filename generation is commonly known as path-name expansion and it refers to a mechanism through which wildcard can work efficiently. This method saves time with commands and enables you to