

```
/compat/linux/lib/libc.so.4.6.27
```

```
/compat/linux/lib/libc.so.4 -> libc.so.4.6.27
```

But the ldd command shows that the following binary is required:

```
libc.so.4 (DLL Jump 4.5p126) -> libc.so.4.6.29
```

As you can see that the already installed binary file is only two versions older, it will still run appropriately. However, you can replace it with the newer version by copying the following files to the FreeBSD system:

```
/compat/linux/lib/libc.so.4.6.29
```

```
/compat/linux/lib/libc.so.4 -> libc.so.4.6.29
```

Manually installing additional and shared libraries will take some time in the beginning. But once you have some general libraries already in the `/compat/linux` directory, you will be able to proceed without too many alterations.

• Installing Linux ELF Binaries

While most binaries can be installed seamlessly, ELF binaries might require an additional step. There is a possibility that the kernel might not be able to distinguish between a FreeBSD and a Linux ELF binary and throw the following error:

```
% ./my-linux-elf-binary
```

```
ELF binary type not known
```

```
Abort
```

To solve this error, you can use the `brandelf` command like this:


```
% brandelf -t Linux my-linux-elf-binary
```

• Configuring Hostname Resolver

Sometimes DNS will not work and show the following error:

```
resolv+: "bind" is an invalid keyword resolv+:  
"hosts" is an invalid keyword
```

If this error occurs, you can solve it by configuring the `/compat/linux/etc/host.conf` file as follows:

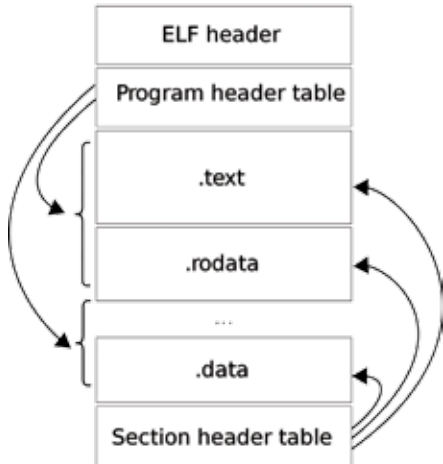

Linux ELF binary header file structure.

Copyright attribution: Uploaded by ELF on Wikipedia.