

order hosts, bind
multi on


This will make the FreeBSD system search for `/etc/hosts` before DNS. However, if a named server is not configured, it is best to remove the bind by using `/etc/resolv.conf`.

How Linux Binary compatibility works

FreeBSD has multiple loaders; an ELF loader is one of them. It looks for ELF binaries to run and execute. For the ELF loader to distinguish a Linux binary, the ELF binary has to be labelled using `brandelf`.

```
# brandelf -t Linux <file>
```

When the loader sees the Linux brand, it replaces a pointer in the proc structure to work as a Linux kernel module. Whenever a system call is made using Linux binary, the proc structure brings the Linux system call entry points and not those of FreeBSD.

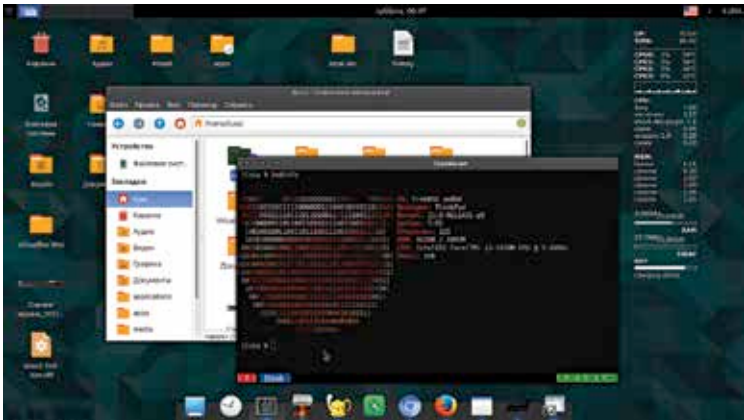

How Linux compatibility works with FreeBSD?

The FreeBSD system then starts by looking for shared libraries in the `/compat/linux/original-path`. If the libraries are not found here, the system looks into the `/original-path` directory. This ensures that all the shared libraries and binaries to make the program compatible and run on FreeBSD are available.

There is also a Linux kernel present in the FreeBSD kernel. This kernel runs the program if all the shared binaries are available. Both kernels pro-