


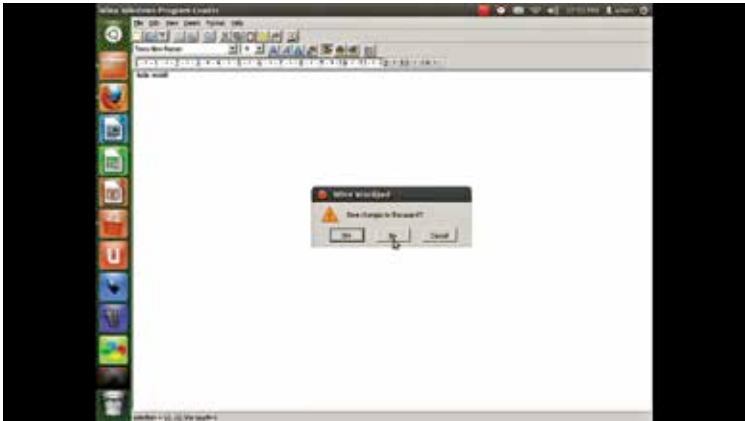

Copyright attribution: Uploaded on Yellowwiner YouTube channel.

Using WINE Windows program loader to run Windows applications.

version. On the other hand, if you install WINE on 64-bit FreeBSD, it will install a 64-bit version. However, if you want to install a 32-bit version on 64-bit FreeBSD, use the following commands to install WINE from the pkg tool and ports, respectively.

```
# pkg install i386-wine
```

Or

```
# cd /usr/ports/emulator/i386-wine
```

```
# make install
```

How to run your first windows app

After installing WINE, it is time to run your first application. If you have a custom app, well and good, but if you don't, the best thing to do is download a portable version of an open-source application and run it. Now, you can run a program either through the command prompt or by using the GUI.

- **Running Windows app through the command prompt.**

You can do it in two ways: Use commands to get to the library or give the entire path.

For the first way, navigate to the directory where the .exe file is stored and then execute with the following code:

```
% wine program.exe
```

To run the program by supplying the full path, use the following code:

```
% wine /home/user/bin/program.exe
```