


- `./etc/rc.subr`
- `name=utility`
- `rcvar=utility_enable`
- `command="/usr/local/sbin/utility"`
- `load_rc_config $name`
- `#`
- `# DO NOT CHANGE THESE DEFAULT VALUES HERE`
- `# SET THEM IN THE /etc/rc.conf FILE`
- `#`
- `utility_enable=${utility_enable-"NO"}`
- `pidfile=${utility_pidfile-"var/run/utility.pid"}`
- `run_rc_command "$1"`

Services such as `inetd` and `cron` can also be used by developers to initiate other services. `cron` provides several customisation facilities to regular users of FreeBSD. It allows them to control the startup and maintenance of required third-party apps.

cron(8) Configuration

The cron utility is an immensely integral part of FreeBSD. It is frequently

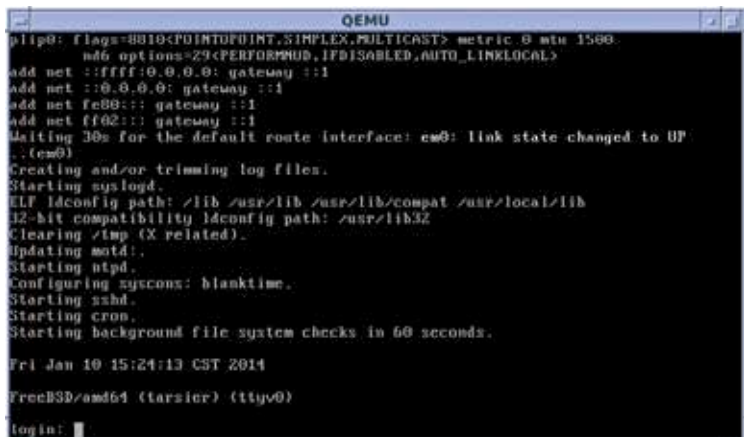

```

qemu
p1p8: flags=8B10<POINTOPOINT,SIMPLEX,MULTICAST> metric 0 mtu 1500
nd6 options=29<PERFORMD,IFDISABLED,AUTO_LINKLOCAL>
add net ::ffff:0.0.0.0: gateway ::1
add net ::0.0.0.0: gateway ::1
add net fe80:: gateway ::1
add net ff02:: gateway ::1
Waiting 30s for the default route interface: em0: link state changed to UP
.(em0)
Creating and/or trimming log files.
Starting syslogd.
ELF ldconfig path: /lib /usr/lib /usr/lib/compat /usr/local/lib
32-bit compatibility ldconfig path: /usr/lib32
Clearing /tmp (X related).
Updating motd!.
Starting ntpd.
Configuring syscons: blanktime.
Starting sshd.
Starting cron.
Starting background file system checks in 60 seconds.

Fri Jan 10 15:24:13 CST 2014
FreeBSD/amd64 (tarsier) (ttyv0)
login:

```

Copyright attribution: Wikipedia