


Instead of creating a new partition, you can also create a swap file in a current partition. Before the swap is enabled, the module needed by `md` must either be loaded into the system or built-in. To create a new swap file, you simply need to create the swap file using `# dd if=/dev/zero of=/usr/swap0 bs=1m count=512`, and then provide the required permissions to the file. In general, excess swap space is added when you start the system again, but you can add it immediately using `swapon`.

Power and resource management

Each one of the hardware or software resources that you use also needs power. Alongside achieving the best system performance, it is always prudent to keep an eye on the power usage of the system and optimise it.

The Advanced Configuration and Power Interface, or ACPI, can be used to manage the power usage of your system. It is included in FreeBSD by default and can be enabled and disabled as required by the user. Utilising ACPI can also lead to a host of different issues with the system. This includes the failure of the mouse, system pauses, hangs, panics, and suspensions. To address these problems, ACPI also has debugging options, and the facility to submit issue reports easily.

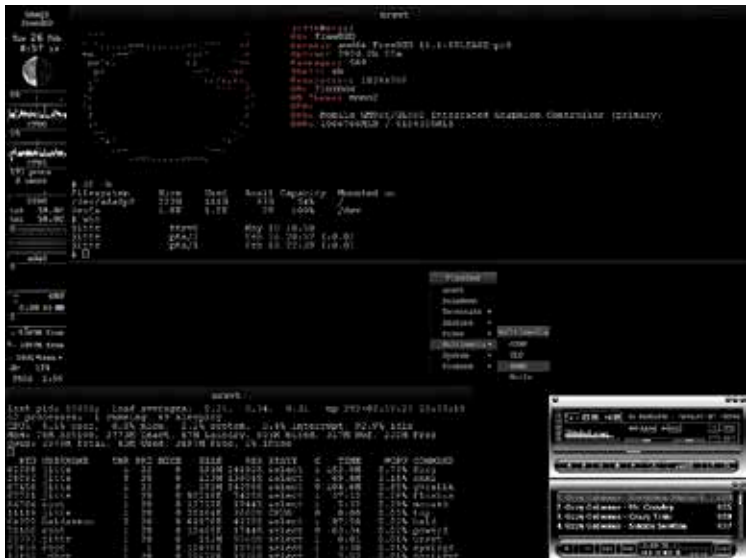

FreeBSD Resource Management