


dependency values and updated only when required. The computed properties are a great mechanism to summarize the reactive logic and implement the consistent values or auto-update UIs.

In the past few years, there seems to be an increasing tendency of maximising the use of template helpers as the main tool to express the logic right in the templates. In this, you will learn about the best choices and the drawbacks. Let's begin.

Computed properties pave the way for defining the properties as the justification or function of other properties. You need to re-evaluate the properties automatically when computer properties depend on the change so that they don't get out of sync. It is one of the progressive frameworks. These frameworks are used to build the user interface. It consists of an approachable core of the library. It is focused on the view layer only and the ecosystem that uses a supporting library to help the operator tackle complexity. Some properties calculate the values rather than store them. In other words, no general or actual memory is stored for them. Instead, they are calculated on the fly each time the operator accesses them. These are called computed properties.

In this article, you will learn about the different kinds of properties. You will learn some tricks used for working with the properties. For example,

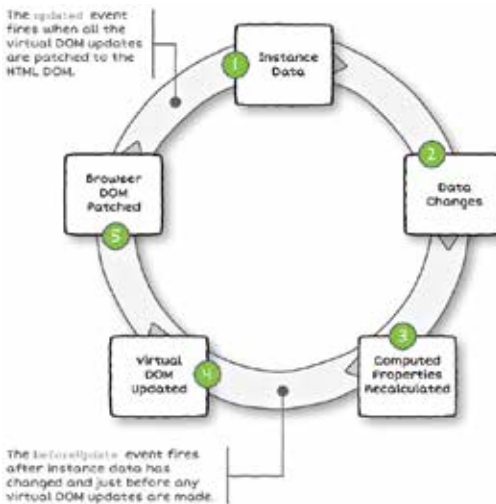

Update events with computed properties