

that the message will not change, and the multiple accesses to the message **reversedMessage** will immediately result in the previously computed results without running on the function again.

```

• computed: {
•   now: function () {
•     return Date.now()
•   }
• }


```

Why is Caching Required?

Let us assume that we have an expensive computed property signed by **A**. This would require looping through a huge array and a lot of computations. We would then have another computed property that would further depend on **A**. Without caching, we would be executing getters of **A** as many times as required. In cases where no caching is needed, we can use the method.

Computed Property vs. Watched Property

Vue provides a generic way to react to the data changes. For example, when you have some data required to be changed to some other data, it would be tempting to overuse **watch**, especially when you are coming from an AngularJS background. Moreover, it is often a better idea to utilize computed property rather than using an imperative **watch** callback.

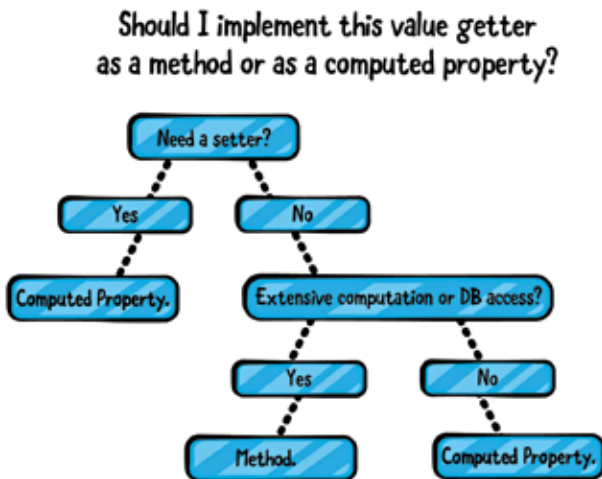

Value getter as a method or computed property