


Depending on our variant colours, we use an inline style to dynamically set the **background-colour** of our divs (**variant.variantColour**).

We no longer need to print our divs now that they are styled by the **variantColour**. As a result, we will remove the **p** tag and switch the **@mouseover** to the div itself.

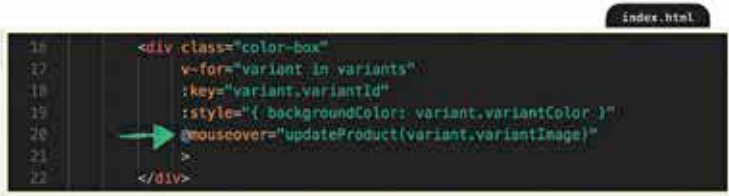

```

16 <div class="color-box"
17     v-for="variant in variants"
18     :key="variant.variantId"
19     :style="{ background-color: variant.variantColor }"
20     @mouseover="updateProduct(variant.variantImage)"
21 >
22 </div>
  
```

Example code

Copyright Attribution: Vuemastery

When we hover over the blue box, the blue socks show, and when we hover over the green box, the green socks appear.

Let's look at class binding now that we've understood how to do style binding.

We already have the following in our database:



```

6 { inStock: true,
  
```

Example code

Copyright Attribution: Vuemastery

We shouldn't encourage users to press the **"Add to Cart"** button if this boolean is incorrect, then there is no product in stock to add to the cart. Fortunately, there is an HTML attribute called **disabled** that will disable the icon.

We can use attribute binding to add the **disabled** attribute whenever **inStock** is **false**, or rather not true: **!inStock**.



```

25 <button v-on:click="addToCart"
26     :disabled="!inStock"
27 >Add to cart
28 </button>
  
```

Example code

Copyright Attribution: Vuemastery