

/boot – Static Boot Files

The files necessary to boot into the system are located in the `/boot` directory – files like GRUB, boot loader files, including our Linux kernels, etc. The boot loader's configuration files, on the other hand, reside in `/etc` alongside the rest of the configuration files.


/cdrom – old Mount Point for CD-ROMs

The `/cdrom` directory is not a section as such of the FHS (Filesystem Hierarchy Standard). It could be found on Ubuntu and many other OS as well. It is a temporary storage place for CD-ROMs that have been put into the system. The usual location for quick media, on the other hand, is the `/media` directory.

/dev – Device Files

Devices are displayed as files in Linux. The `/dev` folder has many particular files that depict peripherals. These files aren't actual files in the sense that we want to see them. Instead, they look like files.

For example, `/dev/sda` denotes the system's first SATA disk. You could launch any partition editor and instruct it to modify `/dev/sda` if you wanted to partition it.

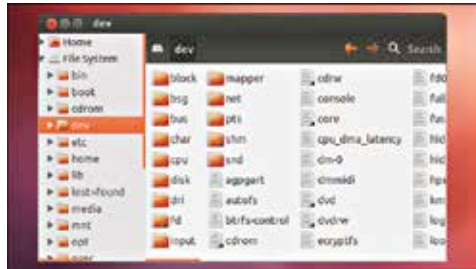

The /dev directory

Source: <https://www.howtogeek.com>

/etc – Configuration Files

Configuration files may be found in the `/etc` directory. It can usually be changed by hand with a text editor. System-wide configuration software and files are located in the `/etc` directory. User-specific configuration files are found in each user's home directory.

/home – Home Folders

Each user's home folder is located in the /home folder. Let us take a case where your username is Joey. Your home folder is stored at /home/Joey. This subfolder contains your data files as well as user-specific configuration programs. Each user has only written access to their home