

For example, non-essential programs are stored in the `/usr/bin` folder instead of the `/bin` folder. Non-essential system administration binaries too are stored in the `/usr/sbin` folder, instead of the `/sbin` folder.

You can find these libraries in the `/usr/lib` directory. Other folders are located in the `/usr` directory, such as `/usr/share`, which includes architecture-independent items like graphics.

Locally built programs are installed by default to the `/usr/local` directory. It protects them from wreaking havoc on the rest of the system.


/var – Variable Data Files

The `/var` directory is the writable equivalent of the `/usr` directory. In normal functioning, it must be read-only. It is used to store log files and anything else usually written to `/usr` during regular operation. Log files, for example, can be found at `/var/log`.

The Linux Ubuntu Server Booting Process

The booting procedure is divided into four phases, which we will go over in more detail below:

- Checking the integrity of the BIOS (POST)
- Loading the Boot loader (GRUB2)
- Initialization of the kernel
- Starting System, the parent of all processes

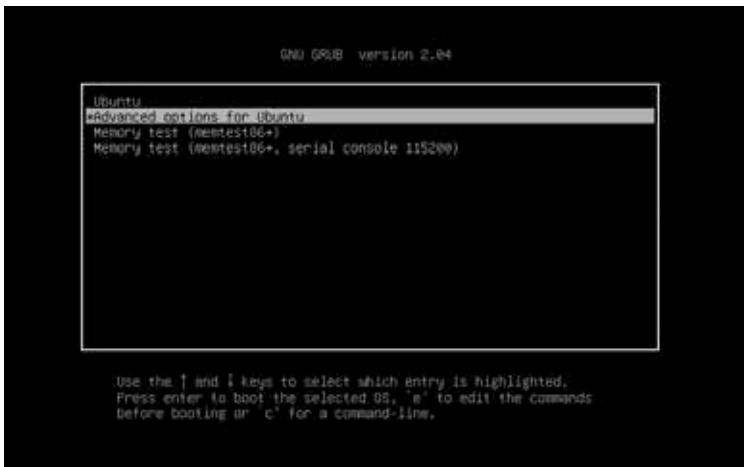

Source: <https://www.ubuntuipit.com/>

Linux Boot Process