

Default Settings

Default settings play a vital role in the creation and manipulation of the account. You can also modify the settings of the user account. Here is an example of the same.

- # useradd -D
- GROUP=100
- HOME=/home
- INACTIVE=-1
- EXPIRE=
- SHELL=/bin/bash
- SKEL=/etc/skel
- CREATE _ MAIL _ SPOOL=yes


Now, there might be a few things in this that you would not be able to understand; however, here is a quick explanation of a few important things in this coding.

Inactive

This is a derivative set that you call in the command wherein you punch the number of days after the previous password expires. It signifies the duration until when the account was locked. If the value is 0, it means the account will be locked because the password will be expiring soon; consider it as a countdown. Similarly, the negative value will show that the account has been inactive for quite some time.

Nologin Shell

Another important aspect that you need to understand from your account point of view is the Nologin Shell. This is because whenever you add any user account (obviously we are talking about new accounts) then the user gets shell access. This access is given to new users as a default setting. Using the Nologin Shell, the user gets to create a new account and run services such as *FTP*, *SMTP*, and running a web server. Moreover, an account holder or a

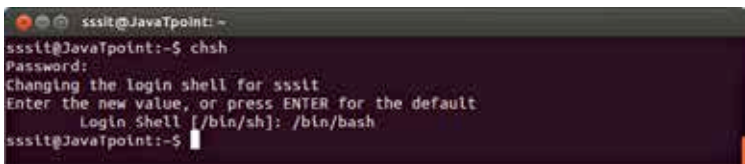

```

ssstt@JavaTpoint: ~
ssstt@JavaTpoint:~$ chsh
Password:
Changing the login shell for ssstt
Enter the new value, or press ENTER for the default
  Login Shell [/bin/sh]: /bin/bash
ssstt@JavaTpoint:~$
  
```

The Nologin Shell helps the user to add a new account and run services such as *SMTP*.