


- With the `u` command, you can display a process running by a particular user.
- With the `M` command, you can arrange by RAM usage rather than CPU usage.
- With the `P` command, you can sort your code by CPU usage.
- With the `l` command, you can switch between CPU usage if there is more than one.
- With the `R` command, you can reverse your output entirely.
- With the `h` command, you can ask for help and go to return through any key.

Stopping Processes

The next aspect of process management is to stop a process in different ways. Sending a `ctrl+c` keystroke is how it's usually done.

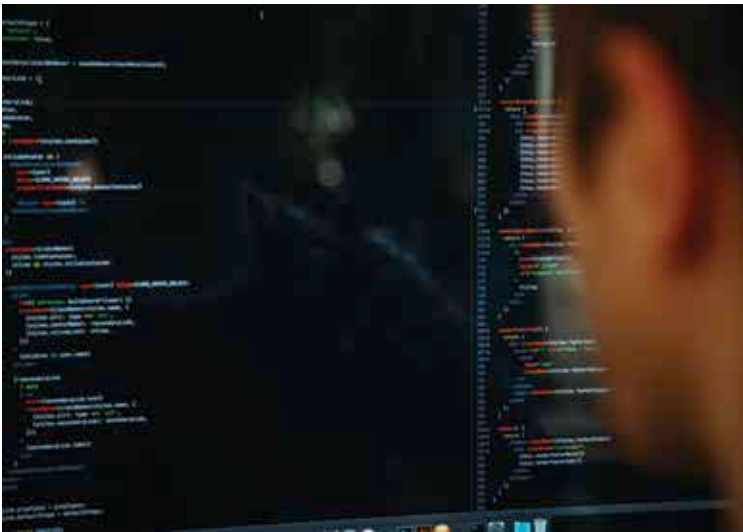

Attribution: Unsplash

How to stop processes in Linux

Here's an instance for you to understand better.

```
$ps -f
UID PID PPID C STIME TTY TIME CMD
amrood 6738 3662 0 10:23:03 pts/6 0:00 first_one
amrood 6739 3662 0 10:22:54 pts/6 0:00 second_one
```