

other than 0, the fsck command will review the order. The main file should be set at 1, and the other devices should be set at 2.

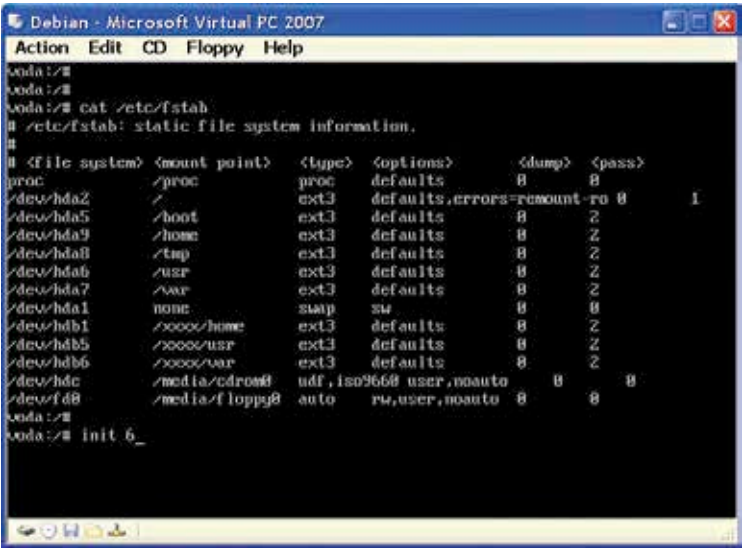


Table format of fstab file in 6 columns

Fstab file structure

Device and mount point

It starts with the first two columns that are device and mount point. Both these columns should be easy to understand and straightforward. When you mount devices using the manual method, you give them specific commands. These columns will specify to mount the same controls. The default mount point for any device in /etc/fstab is its specified mount point. It is the directory in which the device will be mounted if you do not provide any other mount point.

For example, if we use the command `$ mount /dev/fd0`, the floppy disk will be mounted in /media/floppy. If we don't use the command /dev/fd0 in the fstab file, the mount will get confused as it does not know where to place the floppy. You can easily change the default points for any device listed in /etc/fstab. You must ensure that the mount point is already created in the directory. If not, create a mount point and store it in the directory.