

File Allocation Table (FAT)

FAT16 and FAT32 are used as flash cards in cameras and different other devices. It is used as a USB flash device.

- `/dev/hda2 /media/data1 vfat defaults,user,exec,uid=1000,gid=100,umask=000 0 0`
- `/dev/sdb1 /media/data2 vfat defaults,user,dmask=027,fmask=137 0 0`

New Technology File System (NTFS)

NTFS is typically used for a Windows partition.

- `/dev/hda2 /media/windows ntfs-3g defaults,locale=en_US.utf8 0 0`

Hierarchical File System (HFS)


Hierarchical file systems are mostly used by Apple computers.

1. For Read/Write mounting, run this command

```
/dev/sdb2 /media/  
Macintosh_HD hfsplus  
rw,exec,auto,users 0 0
```

2. For Read-Only, use this command

```
/dev/sda2 /media/  
Mackintosh_HD hfs-  
plus ro,defaults 0 2
```

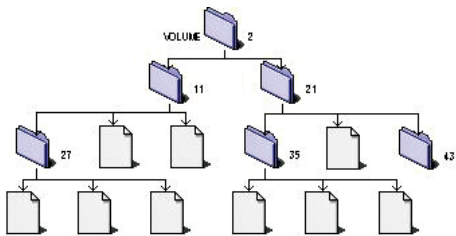

Hierarchical File System

Copyright attribute: https://syntheway.com/Apple_HFS_Hierarchical_File_System_HFS_Plus_Mac_OS_X.htm

Example of /etc/fstab entries

To understand this concept better, we will take into account various fstab entries. We are taking two media devices: floppy and CD devices.

- `/dev/fd0 /media/floppy auto rw,noauto,user,sync 0 0`

This command indicates that the file by default is mounted to `/media/floppy`. Its filesystem is also automatically set up. The two options, read-write and user, should be present if you wish to mount and write to floppy as a user. If you encounter a problem, check the fstab file to see whether these options are present. Also, ensure your sync option is also set as default.

- `/dev/cdrom /media/cdrom auto ro,noauto,user,exec 0 0`

This command indicates that the user option mounts the CD-ROM file. This file has a read-only option as the read-write option is not useful here.