

shown the example with a dummy domain name that can be replaced with the desired domain name:


```
$ sudo mkdir -p /var/www/example.com
```

Creation of “index.html” file

After creating the domain names for the required files of the websites, a separate index file needs to be created. The name of this file is “index.html”; now in this file, you will have to paste the following content:

Now you can save the file and close it. You can anytime also change the permission options with the help of the following terminal command:

```
$ sudo chown -R www-data: /var/www/example.com
```

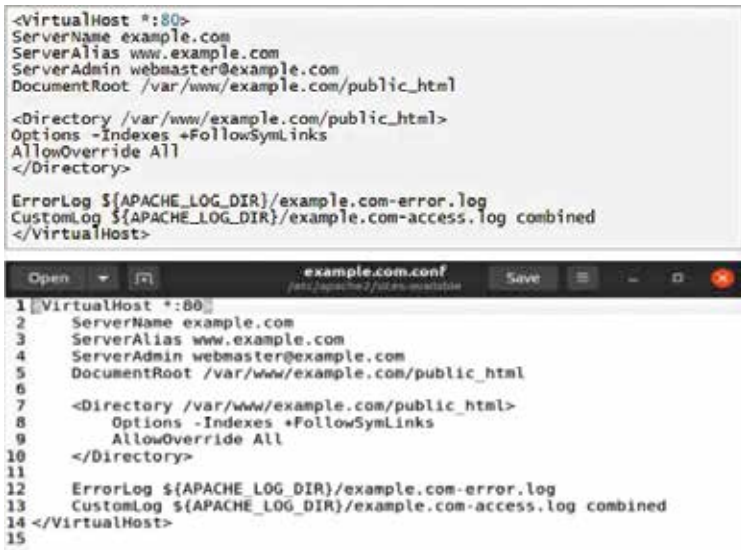

```
<VirtualHost *:80>
ServerName example.com
ServerAlias www.example.com
ServerAdmin webmaster@example.com
DocumentRoot /var/www/example.com/public_html

<Directory /var/www/example.com/public_html>
Options -Indexes +FollowSymLinks
AllowOverride All
</Directory>

ErrorLog ${APACHE_LOG_DIR}/example.com-error.log
CustomLog ${APACHE_LOG_DIR}/example.com-access.log combined
</VirtualHost>
```

Index File Creation

Linking of Configuration File

When you create the index file, this is the time to link the configuration files to the a2ensite utility. For this, you can execute the following command:

```
$ sudo a2ensite example.com
```

However, to check the complete installation, you may need to restart the apache server by opening your browser and typing the following URL in the address bar:

```
$ sudo systemctl restart apache2
```