


on the local system (including the currently used one and a backup), a “HKLMSYSTEMSelect” subkey containing the status of these Control Sets, and a “HKLMSYSTEMCurrentControlSelect” subkey containing the status of these Control is dynamically linked at boot time to the Control Set which is currently used on the local system.

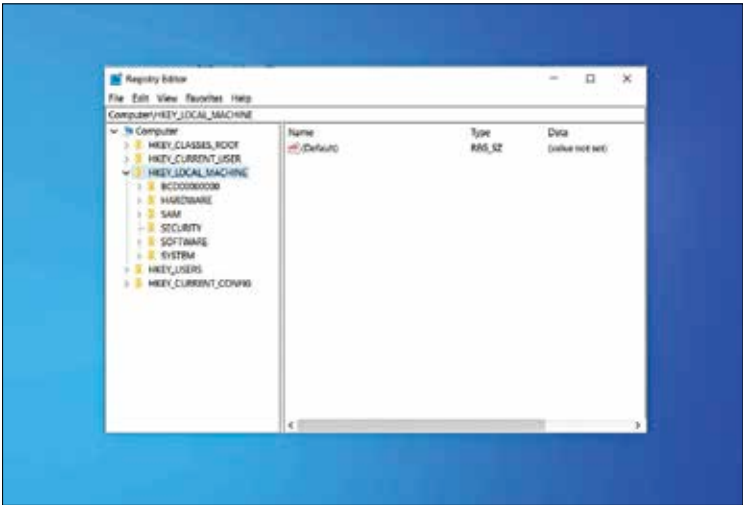

HKLM System Hives

Each configured Control Set contains:

- “Enum” subkey enumerating all known Plug-and-Play devices and associating them with installed system drivers (and storing the device-specific configurations of these drivers).
- “Services” subkey listing all installed system drivers (with non-device-specific configuration, and the enumeration of devices for which they are instantiated) and all programs running as services (how and when they can be automatically started).
- “Control” subkey organising the various hardware drivers and programs running as services and all other system-wide configuration.
- “Hardware Profiles” subkey enumerating the various profiles that have been tuned (each one with “System” or “Software” settings used to modify the default profile, either in system drivers and services or in the applications) as well as the “Hardware ProfilesCurrent” subkey which is dynamically linked to one of these profiles.