


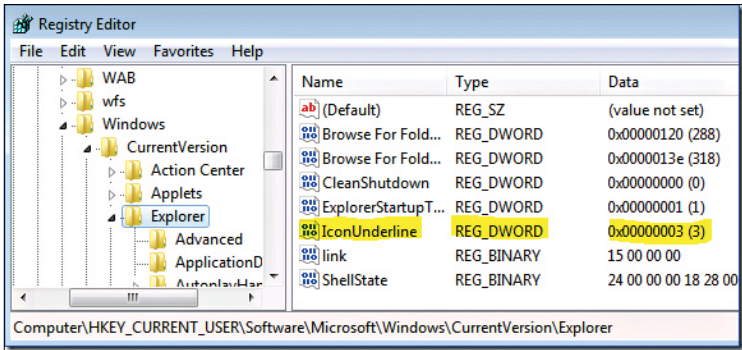

Values for different keys

name/data combinations (which had to be a string). The registry was treated as a single associative array, with a hierarchy of registry keys (in both the registry and dictionary senses) and all registry values being strings. When the 32-bit registry was introduced, it also contained the ability to create several named values per key, which changed the semantics of the names. To retain compatibility with earlier behaviour, each registry key may have a “default” value, which is the empty string.

Each value can have any sort of data, regardless of length or encoding, as well as a symbolic type (given as a numeric constant) that indicates how to read it.

The standard types are:

Type ID	Symbolic type name	Meaning and encoding of the data stored in the registry value
0	REG_NONE	No type (the stored value, if any)
1	REG_SZ	A string value, normally stored and exposed in UTF-16LE (when using the Unicode version of Win32 API functions), usually terminated by a null character
2	REG_EXPAND_SZ	An “expandable” string value that can contain environment variables, normally stored and exposed in UTF-16LE, usually terminated by a null character