


it would have been outdated by now. After all, Developers want to learn CSS because the language can help extrapolate a specific style choice over many different pages. After the style is identified in a Cascading Style Sheet, it can be applied by default to any page that is linked with that particular CSS file.

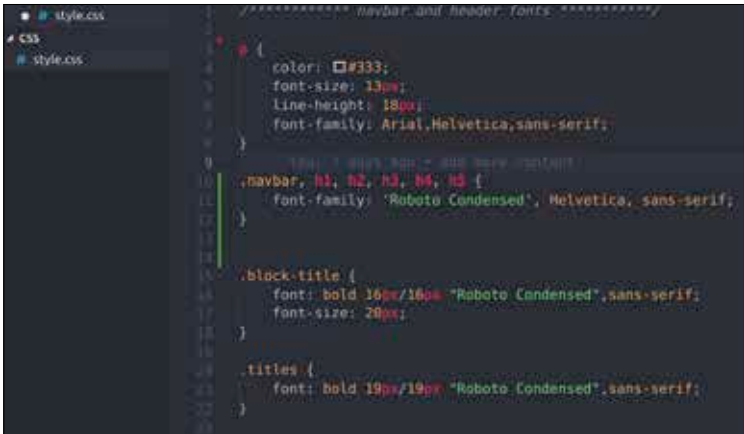

```

1 //***** navbar and header fonts *****//
2
3 {
4   color: #333;
5   font-size: 13px;
6   line-height: 18px;
7   font-family: Arial, Helvetica, sans-serif;
8 }
9
10 //***** main content *****//
11
12 .navbar, h1, h2, h3, h4, h5 {
13   font-family: 'Roboto Condensed', Helvetica, sans-serif;
14 }
15
16 .block-title {
17   font: bold 16px/16px 'Roboto Condensed', sans-serif;
18   font-size: 20px;
19 }
20
21 .titles {
22   font: bold 19px/19px 'Roboto Condensed', sans-serif;
23 }
24
25

```

As you can imagine, this is a feature that saves developers a lot of time and effort as they do not have to go through the trouble of defining every visual aspect of each page manually. This allows them to create a more even, cohesive design without much effort. The language also facilitates quick and easy changes. For instance, if one were to change the default font size, it can be carried out in just a few moments by simply editing the style sheet.

CSS was established in October 1994 by Håkon Wium Lie, who was a Norwegian web pioneer. Lie was sick of the lack of styling options that were available to developers. The concept he came up with was to 'cascade' formatting decisions over different pages. However, while the idea itself



Håkon Wium Lie