


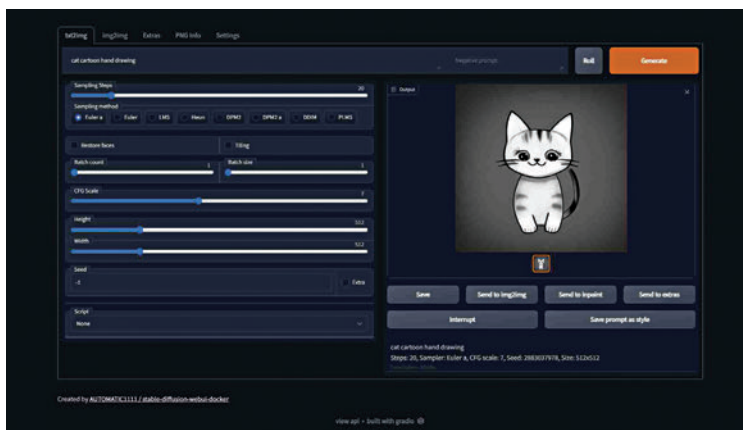

5. **VAE**: An autoencoder module used to decode latent representations into real images.

We can load these components by providing the subfolder argument to `from_pretrained`, specifying the folder where they were saved.

```
from transformers import CLIPTextModel, CLIPTokenizer
```

```
from diffusers import AutoencoderKL, UNet2DConditionModel, PNDMScheduler
```

1. Load the autoencoder model which will be used to decode the latents into image space.

```
vae = AutoencoderKL.from_pretrained("CompVis/stable-diffusion-v1-4",
subfolder="vae")
```

2. Load the tokenizer and text encoder to tokenize and encode the text.

```
tokenizer = CLIPTokenizer.from_pretrained("openai/clip-vit-large-patch14")
```

```
text_encoder = CLIPTextModel.from_pretrained("openai/clip-vit-large-patch14")
```

3. The UNet model for generating the latents.

```
unet = UNet2DConditionModel.from_pretrained("CompVis/stable-diffusion-v1-4", subfolder="unet")
```

Now, we load the K-LMS scheduler with some fitting parameters.

```
from diffusers import LMSDiscreteScheduler
```

```
scheduler = LMSDiscreteScheduler(beta_start=0.00085, beta_end=0.012,
beta_schedule="scaled_linear", num_train
```

Next, we can the models to GPU.