

Online



By Demand

You get to choose what goes on Digit Interactive. This month, you chose:

Ulead DVD Workshop 1.2

Size: 242 MB

Autopatcher XP May '06

Size: 67.8 MB

Subscribe

No more snail-mail! No need to visit post offices! All you have to do is log on to www.thinkdigit.com/subscribe and use your **Credit Card** to make sure you never miss another issue of your favourite magazine!



Listen Up! The Best Audio Gear Reviewed
Subscribe Now

Two articles from the latest issue to whet your appetite:

VOC
Save your business some wallet-drenching calls make all your important international calls for peanuts using VoIP!

The Amazing Tomatoboy!
A Bangalore kid makes games 'for his friends', but we liked his tomato-centric game too! Meet this bite-sized creator of good, clean fun!

TOP STORIES MAY 2006

More Over Silicon | Spreading The Word

Digit Patrons

It really does pay to be loyal! Find out more on www.thinkdigit.com

Digit Reader Poll


This Month's Question

You are exposed to online porn mostly from?

- | | |
|--|--------------------------------------|
| ☐ Internet | ☐ e-mail |
| ☐ Links from Friends/Colleagues | ☐ Online Chat |



To vote Log on to www.thinkdigit.com

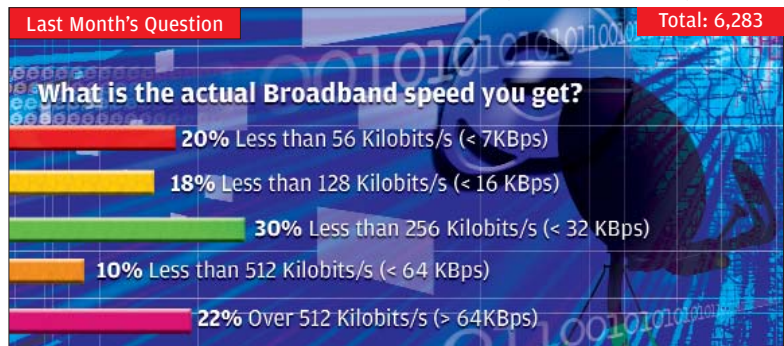

taste technology at www.thinkdigit.com

FEATURED TUTORIAL FROM DIGIT FORUM (www.thinkdigit.com/forum)

Starting this month, we will feature one member tutorial from the forum

Click here to go back to

thinkdigit.com

AJAX Tutorial

29-05-2006,
11:55 PM

[rohan](#)
Broken In



Join Date:
Mar 2004
Location:
Baroda
Posts: 133

Chapter 1: The grounds of our app

Let's first start with a generic XHTML page:

Code:

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml" lang="en"
xml:lang="en">
<head>
<meta http-equiv="content-type" content="text/html" />
<title>My first AJAX page</title>
</head>
<body>
<p>Hello world</p>
</body>
</html>
```

Now, let's create a script object for inserting the AJAX code. Here is the modified <head> section of our HTML page:

Code:

```
<head>
<script type="text/javascript">
<!--
//Our code comes here
//-->
</script>
</head>
```

Now, we come to the server-side. Here is the generic php code for outputting a simple string "AJAX was here":

Code:

```
<?php
printf("AJAX was here");
?>
```

Now things are setup, we can go into AJAX.

Chapter 2: The XMLHttpRequest() object

The XMLHttpRequest() is a JavaScript object. It has the following methods:

Code:

```
XMLHttpRequest.abort() -> Abort the XMLHttpRequest request
XMLHttpRequest.getAllResponseHeaders() -> Get all the headers from
XMLHttpRequest request to the server
XMLHttpRequest.getResponseHeader() -> Get only the 'status' and
'readyState' headers from XMLHttpRequest request to the server
XMLHttpRequest.open() -> Open(Initialize) a XMLHttpRequest()
XMLHttpRequest.send() -> Execute the XMLHttpRequest()
```

It has the following event(s):

Code:

```
XMLHttpRequest.onreadystatechange -> Event executes whenever the
request is available.
```

P.S: Actually, onReadyStateChange is a property of the object which has the value of the function which is to be executed when the request is available.

For the full tutorial (and many more) visit:

<http://www.thinkdigit.com/forum/showthread.php?t=29134>