


## GETTING STARTED

There's a pretty self explanatory demo page at the official site of Annyang (<http://dgit.in/annyang>) which shows integrations with the flickr APIs. It's a must visit for beginners starting with annyang. The instructions to get started are quite simple.

```
<script src="//cdnjs.cloudflare.com/ajax/libs/annyang/2.5.0/
annyang.min.js"></script>
<script>
if (annyang) {
//If supported in the browser..
```

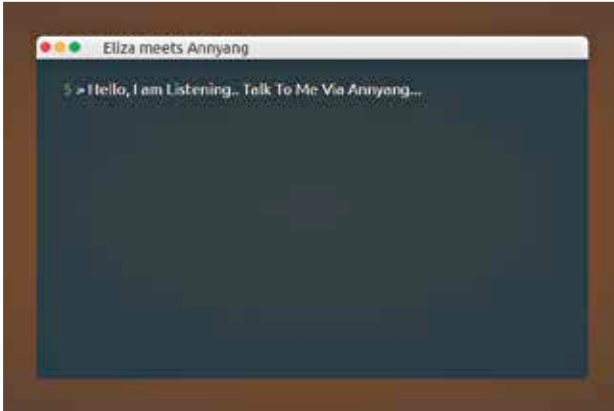

When your speech recognising application is ready to talk to you

Let's define our first command– First the text we expect, and then the function it should call

```
var commands = ['Say hi to Eliza': function() {alert('Hi Eliza');}];
```

Add our commands to annyang  

```
annyang.addCommands(commands);
```

Start listening. You can call this here, or attach this call to an event, button, etc.

```
annyang.start(); </script>
```

## ANNYANG MEETS ELIZA

We are going to build a small demo with the javascript representation of one of the first chat-bots/natural language processors in history, known to the developer fraternity as ELIZA.

ELIZA is a computer program that emulates a Rogerian psychotherapist and was so popular at a time that many people thought it to be a human. We shall add a twist to the original ELIZA program by interacting with it via voice instead of the conventional typed interaction.

(The full project can be forked from <http://dgit.in/ElzaAnyng>)

Note: We shall not discuss the complete creation of the ELIZA using javascript as it is readily available on the web due to a few wonderful developers like George Dunlop.

## STEP BY STEP

**Step 1:** Add annyang as mentioned previously.

**Step 2:** Add the .js file for ELIZA

```
<script src="eliza.js">
</script>
```


**Step 3:** Make sure annyang is supported

```
if (annyang) {
//If supported in the browser
// Our code to interact with annyang...
else{//Do something for unsupported browsers.}
```

In our case we shall show an input box to still allow interactions with ELIZA in non-supported browsers.

**Step 4:** Define our command(s)

```
// * The key is the phrase you want your users to say,
// * The value is the action to do.
```

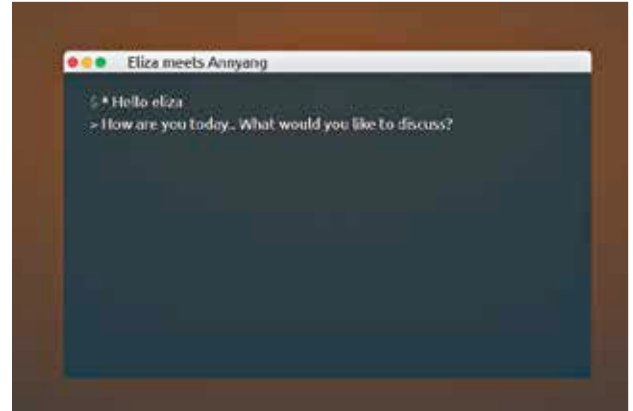

Eliza in action via Annyang

```
// You can pass a function, a function name (as a string), or
// write your function as part of the commands object.
var commands = {'*tag': sayToEliza,
}; // *tag is a splat which gets
// passed as argument to function defined in the value
```

The commands can be in the form of named variables, splats, and optional words or phrases.

```
var commands = [
// annyang will capture anything after a splat (*) and pass
// it to the function e.g. saying "Find a Dog and a Cat" is the
// same as calling function1('Dog and a Cat');
'find a *tag': function1,
// A named variable is a one word variable, that can fit
// anywhere in your command.
// e.g. saying " calculate February profits " will call
// calculateProfits(' February ');
'calculate :month stats': calculateProfits,
// By defining a part of the following command as optional,
// annyang will respond to both: "say hello to my little friend"
// as well as "say hello friend"
'say hello (to my little) friend': greeting;
var function1=function(tag){//Do Something};
var calculateProfits=function(month){//Do Something};
var greeting=function() {//Do Something};
```

**Step 5:** Define our functions that will run when a command is matched

```
var sayToEliza = function(tag) {dialog(tag);};
function dialog() is defined in our eliza.js (See Step 8)
```