

Huawei smartphones

Chinese telecom major Huawei has launched its Ideos smartphones in India

Kindle paging

Amazon has finally added page numbers to the books on its Kindle ebook readers

```
#include <MApplication>
#include <MApplicationWindow>
#include <MApplicationPage>
int main(int argc, char *argv[])
{
    MApplication a(argc, argv);
    MApplicationWindow w;
    MApplicationPage p;
    w.show();
    p.appear();
    return a.exec();
}
```

You can even use the following code and make a traditional Hello World application:

```
#include <MApplication>
#include <MLabel>
#include <MSystemInfo>
int main(int argc, char *argv[])
{
    MApplication a(argc, argv);
    MSystemInfo s;
    MLabel *label = new MLabel
(MObject::tr("hello").append(s.currentCountryCode()));
    label->show();
    label.resize(100,30);
    return a.exec();
}
```

To check if your application is working, you will need to Build and Run it. But since Meego applications cannot run on Windows, you need to either Set up a QEMU emulator on your Windows, (We had to switch to a 32-bit version of Windows 7 for this, as 64-bit Windows is not supported for the emulator.) or test it on a real device.

We are assuming that most of you don't have a real Meego device yet, so let us see how to set up an emulator on Windows:

1. Install the qemu accelerator for QEMU by downloading the package from <http://wiki.qemu.org/download/qemu-1.4.0pre1.tar.gz>. Unzip the package contents and edit the `kqemu.inf` file to incorporate the following changes if you are using Windows 7 like our Developer test environment.

```
[DefaultInstall.NT] --> [Default-Install]
[DefaultInstall.NT.Services] -->
[DefaultInstall.Services]
[Uninstall.NT] --> [Uninstall]
```

```
[Uninstall.NT.Services] -->
```

```
[Uninstall.Services]
```

2. Right-click the `kqemu.inf` file, and click on "install".

3. Open Command Prompt with Administrator privileges by going to Start > All Programs > Accessories and then right clicking on Command Prompt and Selecting Run as Administrator.


4. Run `net start kqemu` in the command prompt window.

Note: You need to start `kqemu` every time you reboot your system.

You might have to start QEMU from the MADDE terminal if it doesn't open properly with the Command Prompt. For that you need to type the following in the terminal:

```
mad list to see the runtime and target names, and then type
mad remote -r meego-handset-ia32-w32-qemu-1.1.20101031.2201-sda-runtime poweron to start the QEMU emulator.
```

5. Now you need to Configure this Emulator in your QT Creator by going to Tools > Options > Projects > Meego Device Configurations and clicking on Add. Use the following details for this Configuration:
Name: Meego Emulator
Device Type: Meego Emulator
Authentication Type: Password
Username: root
Password: meego

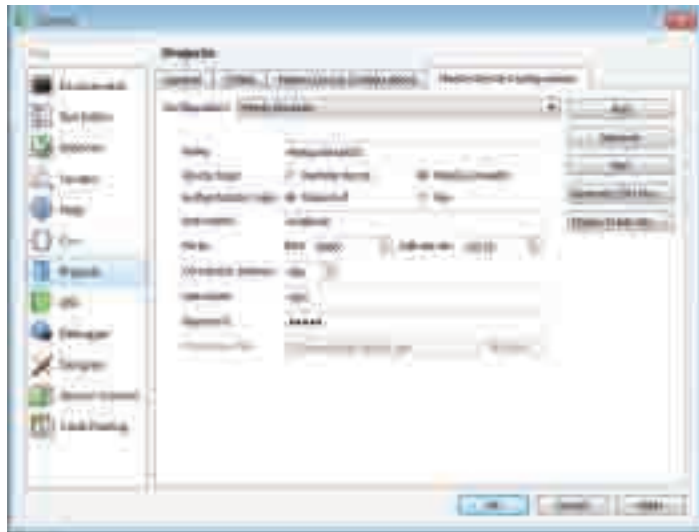

Now your computer is set for Meego development. Time to write some code!

Click on Test to see if this Configuration is properly working and your emulator is set for Meego applications.

6. Next, click on Projects in the Left hand pane and Select run from the Meego Build/Run box at the top of your screen. Make sure that the "Device configuration" is set to "Meego Emulator". This will ensure that QEMU is started when you run your application.
7. You can now launch the QEMU Meego emulator. Click the "Start Meego emulator" icon near the bottom left corner of Qt Creator. Click on the Green button to build and run your first Meego application.
8. Now you can Build, run and deploy your application in the QEMU emulator. If the QEMU emulator has been started by you, just click on the Green arrow in the left pane to run your application in it. Qt Creator will package and deploy your application to QEMU and start it on the target. Compile Output Compile Output view shows the message "Package created." and an .rpm package file (<project name>-<project version>-<release version>-<device architecture>.rpm) has been created in the build-specific project subdirectory ("<project name>-build-meego"). You will later be able to see the window of your application in QEMU.

Note: You can even SSH into your QEMU Image anytime Meego emulator is running. Open the MADDE terminal. Use `ssh meego@127.0.0.1 -p 6666` to SSH to connect to the image from your computer. You can use two standard accounts available in Meego images:
User: meego / root. Password: meego/ meego