


Manual: These services are started by applications dependent on the particular service. By default, manual services are Off, and once activated, they need to be shut down manually, or they will be switched off after reboot.

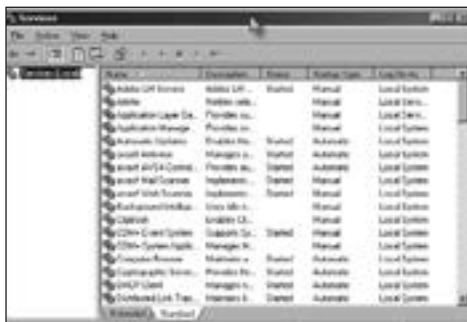

The Services management Console

Disabled: Once ‘Disabled’ is assigned to a particular service, it won’t be activated until it is assigned Manual or Automatic status. For disabling a service, of course, one needs to assign the Disabled attribute to it.

‘Log On As’ indicates the user or the system account the service uses to operate—Network, Local, etc.

8.3.2 Getting Information On A Service

To obtain more information on any service, double-click the service in the Service Management Console. This will open up a window that lists complete information on the service.

There are four tabs in the ‘Properties’ page: ‘General’, ‘Log On’, ‘Recovery’, and ‘Dependencies’. The ‘General’ tab provides information relating to the service such as its true name, path to the executable, startup type, and the option to start or stop it. ‘Log On’ allows you to change the account the service uses to carry out its functions. The ‘Recovery’ tab gives control over what should happen if the service fails, etc. The ‘Dependencies’ tab lists various services a particular service depends on to function. Knowing the dependencies is useful when shutting down a service, so as to avoid an avalanche effect on other, dependent services.