


The start tag (`<?php`) is first as usual, followed by the `echo` command, which displays a message or “string” on the screen. The `<i>` is used to display text in italics; we then assign a value to the variable “digit”, while declaring it.

The *If* statement follows, with a condition to display some text if its parameters are met, i.e. if the variable “digit” is equal to 1, which it is, as we assigned the value just above.

As seen from this example, the similarity to the C/C++ and Unix Perl-style programming is strong.

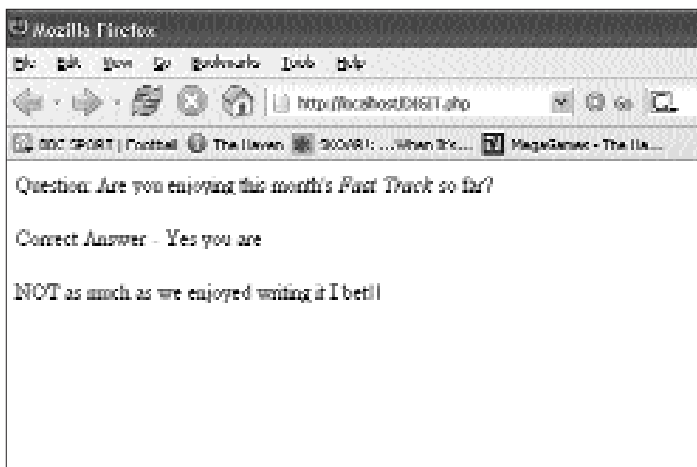

The result of our first program

The file, named `DIGIT.php`, was placed in the “www” folder, where a simple “`//localhost/ DIGIT.php`” typed into the browser pane would open the result of our labour directly in the browser window.

Having used the *If* statement above, it would be apt if we discuss the various conditional operators that PHP supports.