


click each individual setting to open its data values. You can then edit the value as required.


To add a key, right-click on the parent key (similar to the parent folder in Explorer) and select **New > Key**. Enter the name of the key and press [Enter]. To add a value, select the key, right-click and select **NEW**, and the data type for the new value. Give a name for the value and press [Enter]. Double-clicking the value will enable you to modify it.

As mentioned in *Chapter 1*, the value type is determined by the context, and there are three basic data types: String, DWORD, and Binary.


“String” is a human-readable text entry and is used for most user-defined entries such as text, filenames, file paths, and so on. DWORD is a Boolean entry, which is usually a set of values such as yes, no, 0, 1, 2, 3, and so forth. Binary is raw binary data stored directly as 1s and 0s (binary format) and is entered either in binary or in hexadecimal format.

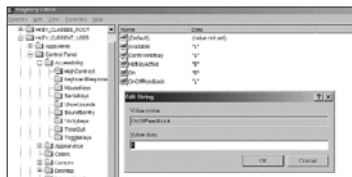


Double click setting to edit value

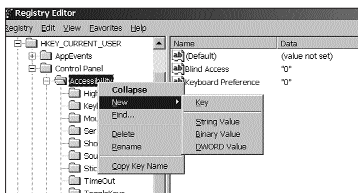


New Key

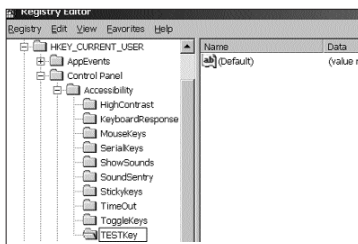

New key created

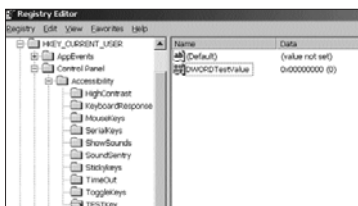

Adding a Key value setting

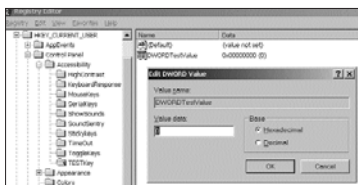

Modifying a newly added value setting