


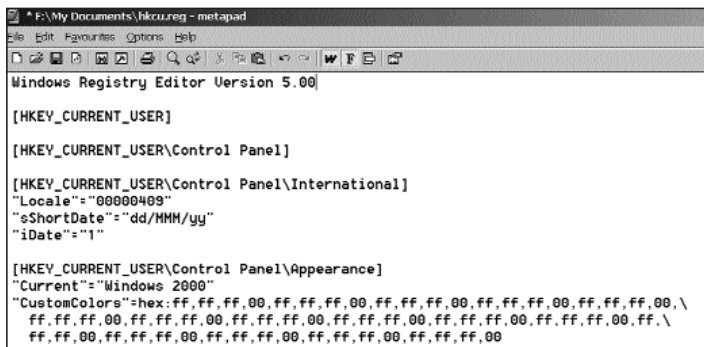

Typical entries in a .reg file

Windows XP/2000 as well as on Windows 98/NT4.0 systems, since the Registry is backwards-compatible. However, .reg files with the header “Windows Registry Editor Version 5.00” will only work on Windows XP/2000 based systems.

Note that when creating a hack on Windows XP/2000 targeted at earlier versions of Windows, you should always test whether these hacks will work on those earlier OSes. If you are unable to test it on earlier Windows versions, release the .reg file with the header “Windows Registry Editor Version 5.00” to prevent accidental updates into the registries of those earlier Windows versions. If you are quite certain that the hack is harmless to Windows 98/NT4.0 machines, and you do want to release it to that group of users as well, then at the very least, include a disclaimer such as “Not tested on Windows 98/NT4.0; deploy at your own risk!” so that the user is sufficiently warned about what he is about to do.

The *Blank line* informs the Registry of the start of a new Registry path. Every key and sub-key starts with a new Registry path and helps you identify the location of each of the entries in the registry when examining the contents of the .reg file.

RegistryPathx is the path to the location in the Registry of the particular key or sub-key whose values you will be adding, modi-