


2. Write Changes—The write changes function is used to commit any pending changes to the disk.

Carrying out operations in Partition Logic is fairly simple. For example, to make a new partition, you use the Create function. The user must first select some empty space in either the partition diagram or the partition list. Clicking this button or menu item raises a dialog window to prompt the user for information (location, size, etc.) about the partition to be created. No changes are made on disk until the user commits them using the Write Changes button.

5.1.3 GParted (<http://gparted.sourceforge.net>)

GParted translates to Gnome Partition Editor. It is used for manipulating filesystems, that is, create, resize, etc. The stand-out feature is that it is used for creating space for new operating systems, and for disk imaging.

The purpose of GParted is to allow the individual to take a hard disk and change the partition organisation therein, while preserving the partition contents.

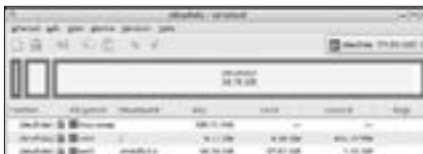

The GParted Live CD is light and simple

GParted maintains a very simple GUI. It is downloaded as a “live CD” .iso image, from which a bootable CD can be created for the system.

There are some Linux distributions that are Debian-based, and use a software called apt. Certain others are Red Hat based, and use a software called yum (yumex, kyum). To download and install GParted, use:

```
# yum install gparted  
or  
#apt-get install gparted
```