


For our free office, we chose Apache James because it is a free and portable Java Enterprise mail server that runs on Windows, Unix / Linux, and Mac OS X. It uses standard open source protocols like SMTP, POP3, and NNTP. James is a part of the Apache Software Foundation, one of whose projects is Apache Tomcat, an open source and free Java Web server that powers a fairly large proportion of the sites on the Internet.

11.1 Installing James

Download the latest stable binaries from the download section at <http://james.apache.org> . Select either the .tar or .zip binaries, depending on your system (Linux or Windows). Since James is built on Java, you need to have the JDK installed; the latest version can be obtained from <http://java.sun.com/javase/downloads/index.jsp>. Extract the binaries into a folder in your hard drive. Navigate to bin\run.bat (Windows) or bin/run.sh (Linux) and run the file.

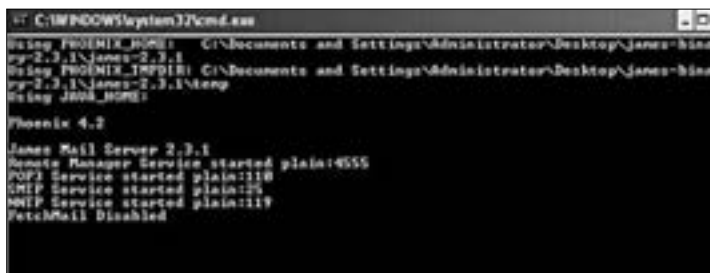

```
C:\WINDOWS\system32\cmd.exe
Using PHOENIX_HOME: C:\Documents and Settings\Administrator\Desktop\James-bin
jy-2.3.1\james-2.3.1
Using PHOENIX_TMPDIR: C:\Documents and Settings\Administrator\Desktop\James-bin
jy-2.3.1\james-2.3.1\temp
Using JAVA_HOME:
Phoenix 4.2
James Mail Server 2.3.1
Remote Manager Service started plain:4555
POP3 Service started plain:1118
NNTP Service started plain:1119
FetchMail Disabled
```

Installing James on your system

You will see something that looks like this:

Hit [Ctrl] + [C] and terminate the process. This completes the installation of James.

James implements maillets and matchers - Java APIs that determine how to deal with incoming and outgoing mail. Since these are provided with the distribution, users can modify these APIs to suit their own needs - there are a wide range of configuration and