


Save the modifications you made to the `config.xml` file and close it.

Also check the MX record section for your domain using **www.dnsreport.com** and confirm that the MX records point to your IP address. This is necessary if mail has to be routed to your domain.

11.3 Sending Mail

To use James as a mail server, you have to check whether it is accepting mails or not. Run `run.bat` or `run.sh` again. Type `telnet localhost 4555` at the command prompt. You will be prompted to enter a user ID and password. Enter `root` at both the prompts. Create user accounts using the command `adduser`

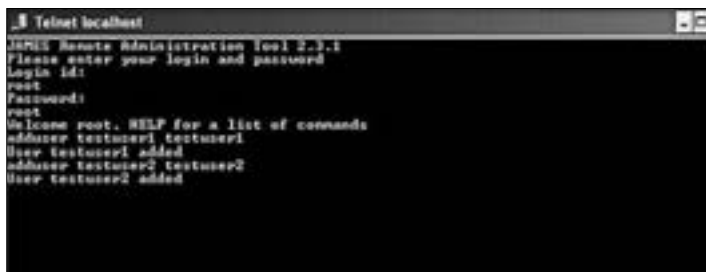

```
Telnet localhost
JAMES Remote Administration Tool 2.0.1
Please enter your login and password
Login ID:
root
Password:
root
Welcome root. HELP for a list of commands
adduser testuser1 testuser1
User testuser1 added
adduser testuser2 testuser2
User testuser2 added
```

Start by creating user accounts

[username] [password]. We created two users with the usernames `testuser1` and `testuser2`. Type `quit` to close the connection.

Start your e-mail client. Keeping in mind the requirements for a free office, we are using Thunderbird, a free mail client from the Mozilla foundation, which is also behind the popular Firefox browser.

Open Thunderbird, go to **Tools > Account Settings** and create accounts for the two dummy users you created earlier. This