




Your first mail sent using James...

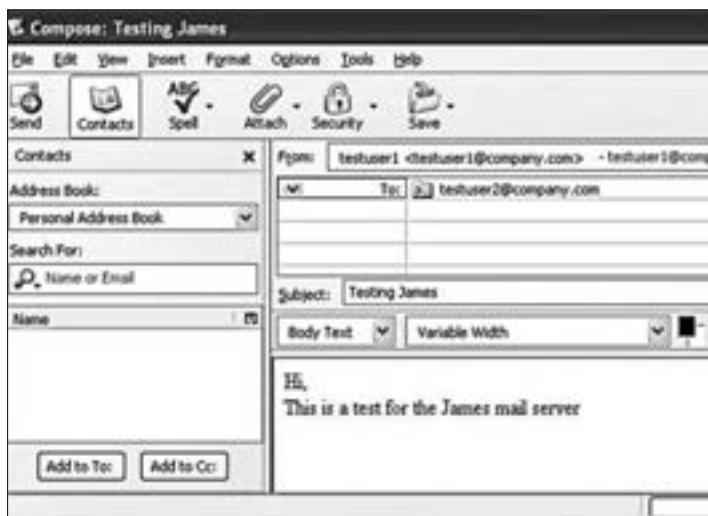

...and the message is received!

should be fairly straightforward. Now use localhost as the server name. Compose a mail from one user, say **testuser1@company.com**, to **testuser2@company.com** and send it. When you check the inbox of testuser2, you should see the mail you sent. James is now ready for use!