


1.4.1 OpenOffice.org > General

Under General, you will see the following settings that you can change:

- Tips: Enable/disable tool tips
- Extended tips: More or less details in tool tips
- Help Agent: Enable/disable help and suggestions from OOo's inbuilt assistant
- Help Formatting: Select between high and low contrast for the help section
- Use OpenOffice.org dialogs: Choose between operating system dialog boxes and OOo's own dialog boxes
- Printing sets "document modified" status: Choose whether printing a document counts as a document change—whether modified print settings are saved
- Year (two digits): Choose a century between which two-digit year inputs are interpreted. Does 07 mean 1907 or 2007?

1.4.2 Other Important Settings

- Memory > Undo: Choose how many levels of undo are saved by OOo
- Memory > Graphics cache: Select how much memory OOo uses for itself and the graphics it embeds. (This is best left at the default values unless you face slowing down or crashes)
- Memory > Cache for inserted objects: How many insert-ed objects are stored in memory
- Memory > OpenOffice.org Quickstarter: Select whether to enable or disable the Quickstarter in the taskbar at startup.
- View > 3D View: Choose whether software rendering or OpenGL is used to render 3D objects in OOo.
- Paths > Paths used by OpenOffice.org: Change the default paths that OOo uses to read and write data for:

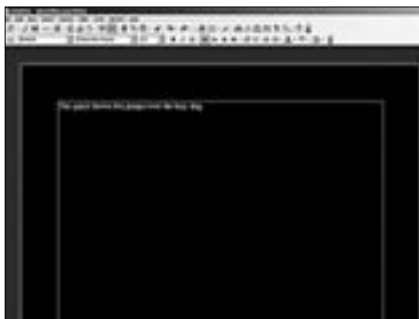

For those who like to be different, use the Options to change the default colours of the interface