


```
startDrag("aa", true);
```

Here aa is the name of the movieclip which you want to drag. "True" means the mouse will be locked with the centre of the movie clip.

Set Property

If we want to change the property of any movieclip through scripts you use this Set Property action Script. You can change properties like alpha (visibility), height, x position, y position, xscale, yscale and other properties through this script. To use this code you need a movieclip and give it an instance name. The script also requires the value of the property apart from the instance name.

```
setProperty("aa", _alpha, "0");
```

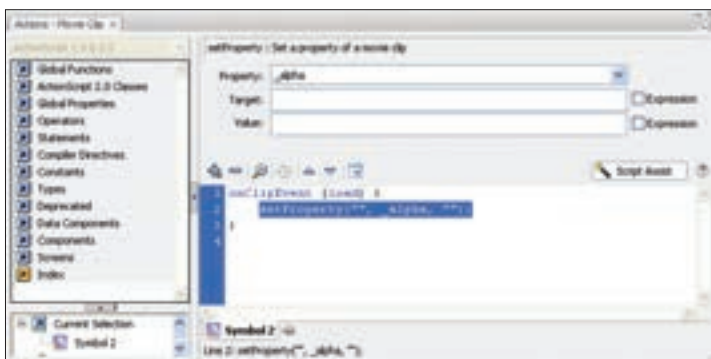

Set Property

From this script it is well understood that if you add this code to a particular keyframe then at that instant the visibility of the movie clip whose instance name is aa becomes 0. That means it becomes invisible when the movie clip reaches a particular keyframe.

stopAllSounds

Flash can play sounds in the background of an animation. But you may stop all these sounds by a single click of mouse on a button.