


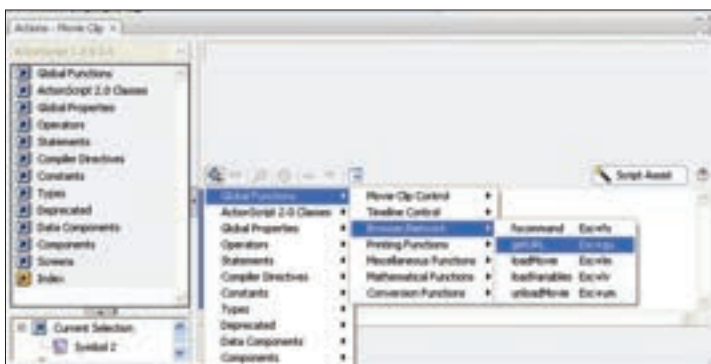

Get URL

_top: the url opens in the top-level frame in the current window.

method:String [optional] – This is also an optional property. A GET or POST is a popular method for sending variables. The GET method is a bit unsecured method as it appends the variables to the end of the UR. GET Method is generally used for small numbers of variables. The POST on the other hand sends the variables in a separate HTTP header and is thus much more secured. POST is generally used when we are sending long strings of variables.

LoadMovie

LoadMovie syntax is used when you want to call a SWF file from another movie. This script plays a vital role while creating interactive presentations.

```
on (release) {
    loadMovie("baby.swf", "my_stage");
}
```

This script means if you click on the button with which this script is attached then another swf file called `baby.swf` located in the same directory will open. The second part i.e. `my_stage` is the name of a movieclip. By using this instance name in the script we