


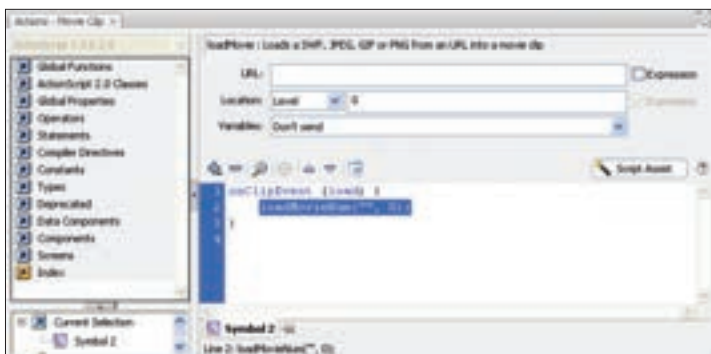

LoadMovie

can specify that the `baby.swf` file will open in the area of the movieclip. Of course for that the location should be set to Target rather than Level.

UnloadMovie

In our previous section we have learnt how to open a SWF file inside another file. Now you may need to remove the file after your purpose is over. Here we use the script `UnloadMovie`.

```
on (release) {  
    unloadMovie("baby.swf");  
}
```

This script clearly indicates that if you click on the particular button to which `UnloadMovie` script is attached then the external swf file which you have called by using the script `LoadMovie` will be removed from the stage.

9.11 Variables

Variable is a common concept in any programming or scripting Language. Before we start discussing the use of Variable in Flash, let us understand what variables are.