

```
}  
  
var myExample:Examples = new Examples();  
trace(myExample.status); // output: initialized
```

The constructor methods can only be declared as public and no other access specifiers like private, protected or internal can be used on a constructor. Besides these, an user defined namespace also cannot be used with a constructor method.

For making an explicit call to the constructor of its superclass, a constructor can use the `super()` statement; otherwise the compiler automatically inserts a call before the first statement in the constructor body. The methods belonging to the superclass can also be called by using the `super` prefix as a reference to the superclass.

2.8 Creating a Simple Flash Application using basic programming concepts

Example 1:

Swapping of Two Values (.fla file given : Swapping.fla)

Say, you have two text fields where a user can input texts or numbers. Perhaps you want that clicking on a button causes the values of two fields to be interchanged. Let's see how we can programmatically develop this using Flash CS3.

- i. Open a blank document in Flash CS3. If the flash application is opened in Action Script 2.0, this should be set here.
- ii. Now select the Text Tool and create two text fields on the stage

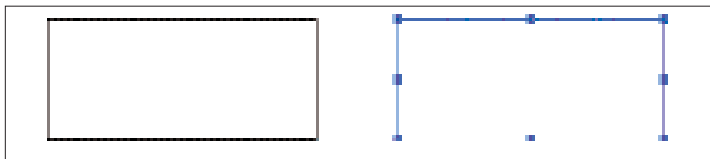


Fig 201: Creating Text Boxes