


```

num1 = k;
gotoAndStop
(10);
}

```

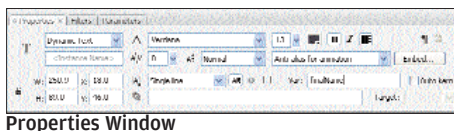

Properties Window

Fig 211 : Actions Button

xxiii. This means that when the button is clicked then a variable called str1 is declared whose data type is string. Now as “j” is the variable name which can never be a character we will store that inside the string type variable which is str1


xxiv. Similarly num1 is declared as an integer type variable and the variable k, i.e. the age, is stored within it. Remember age is always a number and so we will store it within a integer type variable. The script gotoAndStop(10); basically takes the play ahead to 10th frame.

xxv. In 10th keyframe of the layer containing the script, add another action script:


```
finalName = "Hello "+str1+", your age is "+num1";
```

xxvi. This will cause the ‘str1’ variable, which holds the name to appear after the word “Hello”, and the age, stored within “num1”, will appear after the term “your age is”.

xxvii. All these will be concatenated as one sentence and the entire thing will be displayed inside the dynamic Text field in the 10th frame.

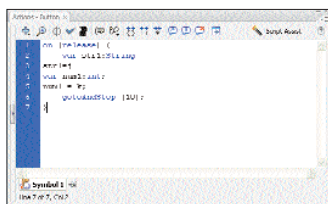

Actions Button

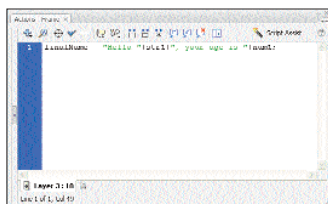

Actions Frame