

```

duplicateMovieClip
("friend", "dupMC" + x,
x);
_root ["dupMC"+x]._y
= Math.round (Math. ran-
dom ()*200)
_root ["dupMC"+x]._x
= Math.round (Math. ran-
dom ()*400)
}
}


```

- Press ([Ctrl] + [Enter]) to see the pre-view

Explanation of the Script for

```
(x=0; x<Number(input); x++) {
```

The above code creates a for loop where a variable x is looped the number of times based on the number that is given as input on the input text.

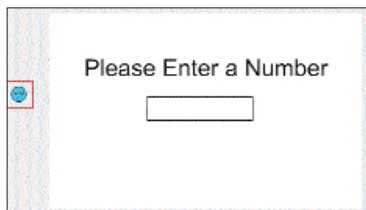

Placing the Object



Conversion to Button

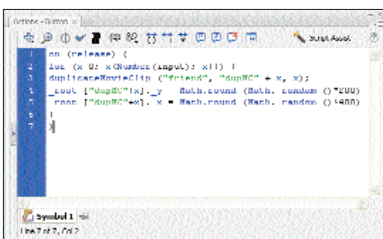


Fig 306: Adding code in Actions Window

```
duplicateMovieClip ("friend", "dupMC" + x, x);
```

This code defines a method named duplicateMovieClip where the movie clip object, friend, is passed as a parameter. This method duplicates the new movie clip and a dynamic and unique name is given to it which was created by adding the value of x to the string dupMC.

```
_root ["dupMC"+x]._y = Math.round (Math. ran-
dom ()*200)
```

The above code returns a random number which is a multiple