


- Now open a new ActionScript file and type the following script as shown below:

```
class Login2 {  
    private var __username:String;// a class that  
contains a property called userName:  
    public function Login2(username:String) {  
        this.__username = username;  
    }  
    public function get userName():String {  
        return this.__username;//getUserName()  
returns the current value of userName  
    }  
    public function set userName(value:String):Void  
{  
        this.__username = value;//sets the value  
of userName to the string parameter passed to the  
method.  
    }  
}
```

First a class 'Login2' is declared that contains a property called 'username'. This variable username is declared as String type. Next a constructor having the same class name i.e 'Login2' is defined and the parameter is passed to it. Next a get method is defined which returns the current value of the user name. Finally the set method is declared which sets the value of userName to the string parameter passed to the method.

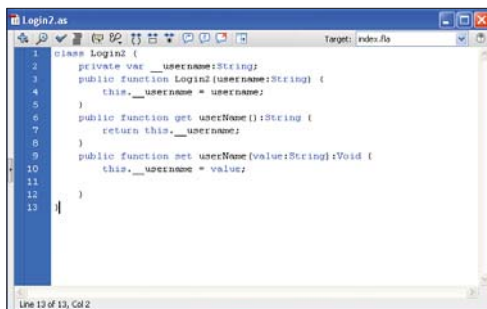

Class Declaration