


```

    }
    cout << res;
    return 0;
}

```

The output of this program is:
729

Here, an array `Jim` is declared and its elements are initialised with some values. Then, by using the `for` loop, the values of the elements are added and the result is stored in an integer variable `res`. The value of `res` is then displayed.

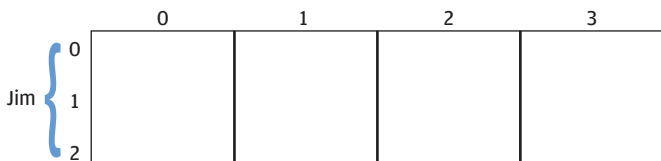

Multidimensional arrays

A multidimensional array is an "array of arrays". This can be represented as follows:

In the above example, `Jim` represents a bi-dimensional array of `3 x 4` elements of type `integer`. This is declared as:

```
int Jim[ 3][ 4] ;
```

In C++, in order to accept arrays as parameters while declaring a function, it is required to specify the element type of the array in its parameters - an identifier and a pair of void brackets `[]`. Consider the following statement:

```
void p1(int a1[] )
```

Here, `p1` is the function that accepts an array as parameter of type `int` called `a1`. You can understand this from the following program.