


large, a Linux distribution will work with either RPM packages or DEB packages.

DEB files are available on www.getdeb.net and RPM files are available on <http://sourceforge.net>. <http://rpm.pbone.net/> is another site for RPM downloads, particularly useful for downloading libraries and dependencies. It is an RPM search engine. Once the packages are downloaded to a relevant folder, all you need to do is double-click to install. If another version of the software is listed in the repository of the distribution, then a prompt will show up.

Usually, the distribution will have been tested with the version of the software listed in the repository. In most cases, it works fine to use the version you have downloaded. In some distros, the installer does not manage the dependencies as effectively as it's done in other versions.

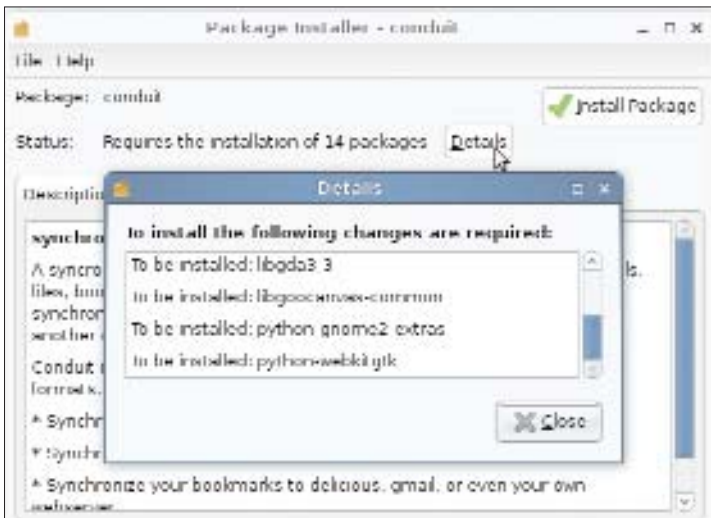

In Linux Mint, the dependencies are listed. These will be downloaded and installed along with the contents of the package you have already downloaded. If you're facing problems with dependencies in an RPM-based distro, a software called 'yum' is better at resolving dependencies as compared to YaST. If the necessary dependencies are not there in the system, and the installer does not automatically install the dependencies, you will be given a list of