



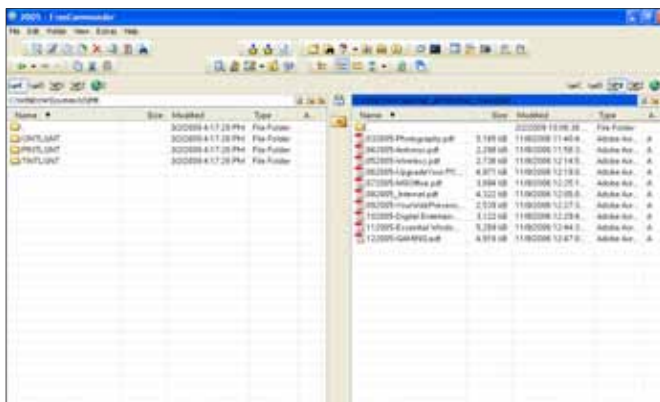

The split pane view of FreeCommander

TrackType.org. The second approach is using the filename itself to generate the tag information. Parts of the filename can be interpreted using placeholders again. These placeholders are similar to the ones used to name the files, and work in reverse. If tracks in a folder are named something like “Tryad-listen.mp3”, then using the placeholder %artist%->%track% will interpret “Tryad” as the artist and “listen” as the track name. You can choose to leave existing values, update them or overwrite them. Updating the existing values is the best choice.

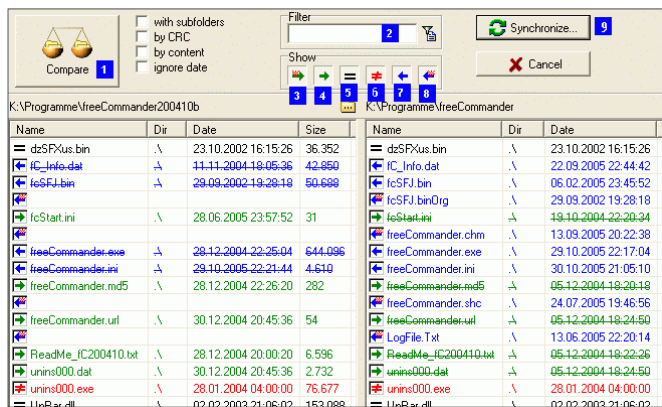

Synchronising two folders