


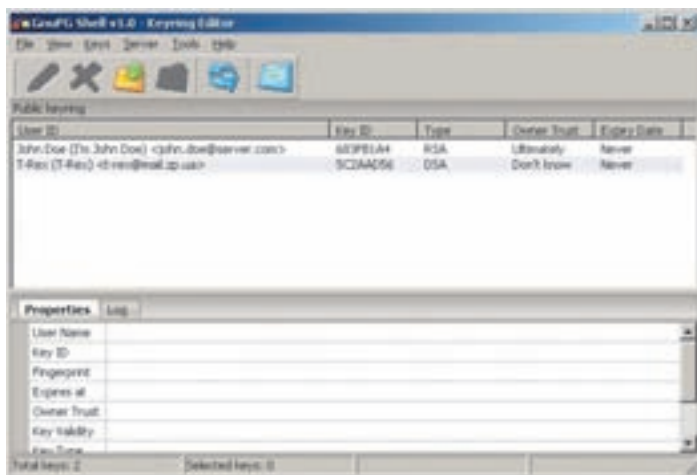

An example Keyring editor

```
c:\>gpg -a --export example@xyz.com >mykey.pub
```

This creates “mykey.pub”, a text file that contains your public key. You can now mail this to the person who’s going to encrypt data to be sent to you, or post it publicly if you like.

In order to encrypt data, the sender will have to install GPG as above. They don’t need to create their own public/private key pair in order to encrypt your data. All they need is the public key you created above, and made available to them somehow. Start by “importing” your public key onto their key ring.

Note the dire warning about making sure you know whose key you’re dealing with at the end of the encryption process. There are ways to modulate this message but for now, assume you can trust the receiver. The result of this example operation is “example.xls.asc”. This text file is your encrypted data. You can email it with confidence to the intended recipient, knowing that only they can decrypt it with their matching private key.

So you’ve passed your public key to the sender, they’ve used it to encrypt your sensitive data, and have emailed you the encrypted results. From your mail client, save the encrypted data to a text file - it’s ok to leave headers and such in the file, the decryption program will ignore it.

To decrypt, you’ll do this: