

as they are also called “Autotools”. Consider them as tools that make installing from source easier and feasible across system with different operating systems and hardware.

You will have to first download the source-code tree folder by one of the methods mentioned above.


Once you have done that you will have to decompress the archive, either by using your preferred GUI archive manager or by issuing the following command in the shell

```
tar xvfz package.tar.gz or tar xvjf package.tar.bz2
```

This will extract the contents of the archive into a folder by the name of “Package”

Now let us first examine the folder in a little detail before we actually go and compile the code.

If you open the folder, you will see further folders and files in it as shown in the screenshot. The screenshot is of a “Hello World” program we created which has been packaged with the

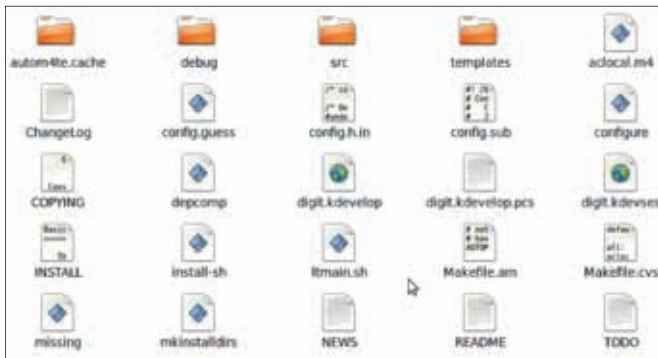

The folder "src" and file "configure" are vital

GNU build tools.

Out of all the files above, one folder and one file is of primary importance to you - the folder called “src” and the file called **configure**. **src** contains all the source code files and



Makefile.am and makefile.in contain information for the make command