


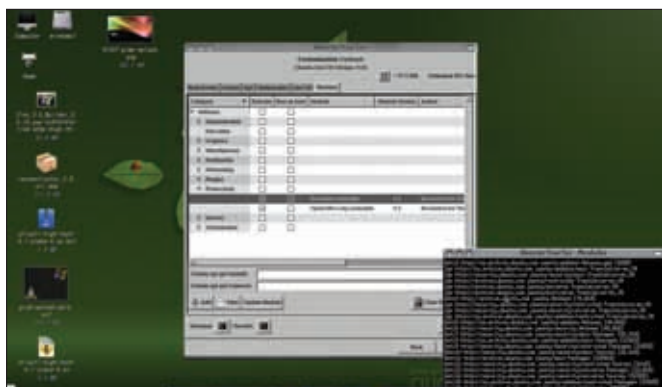

Adding modules to the distribution

above the Next button. A Chroot terminal window will open and apply the modules.

Writing Modules

Modules are basically shell scripts, which run inside the chrooted environment.

RMOD_ENGINE= which engine to use to process this module (basically always 1)

RMOD_CATEGORY= in which category this module belongs (normally Software)

RMOD_SUBCATEGORY= the subcategory of this module (select from a list: Administration, Education, Graphics, Miscellaneous, Multimedia, Networking, Plugins, Productivity, Servers and Virtualization)

RMOD_NAME= the name of the module

RMOD_AUTHOR= author of the module

RMOD_VERSION= version of the module, it is needed for updating the module via the “Update”-button

RMOD_DESCRIPTION= a short description of the module

RMOD_RUN_IN_CHROOT=True

RMOD_UPDATE_URL= where to find updates of this module

```
echo Running $RMOD_NAME...
```

```
apt-get update
```

```
apt-get install package name
```