


1 Getting Familiar

a file would have two parts to it. One would be a data "fork" that would contain more or less the same data as other file systems and the other was the resource "fork" which contained information regarding styling etc. The advantage of having forks was that applications other than the one which created a file could still access the data in the data fork. This however becomes a problem when one transfers files from the Mac to other operating systems. The files lose their resource fork and only the data fork will be retained. This difficulty led to the development of MacBinary, BinHex and other encoding programs that combined the data fork, the resource fork and finder information into a single document. The documents can then be run on Windows and Unix with no loss of information.

Systems 5, 6 & 7

The MultiFinder allowed users to run multiple programs at the same time. System 6 was the first Mac to utilise 32-bit memory addressing to its fullest. Before this the Mac used to have an arrangement in which 24 bits were used for addressing and 8 bits were not fully utilised.

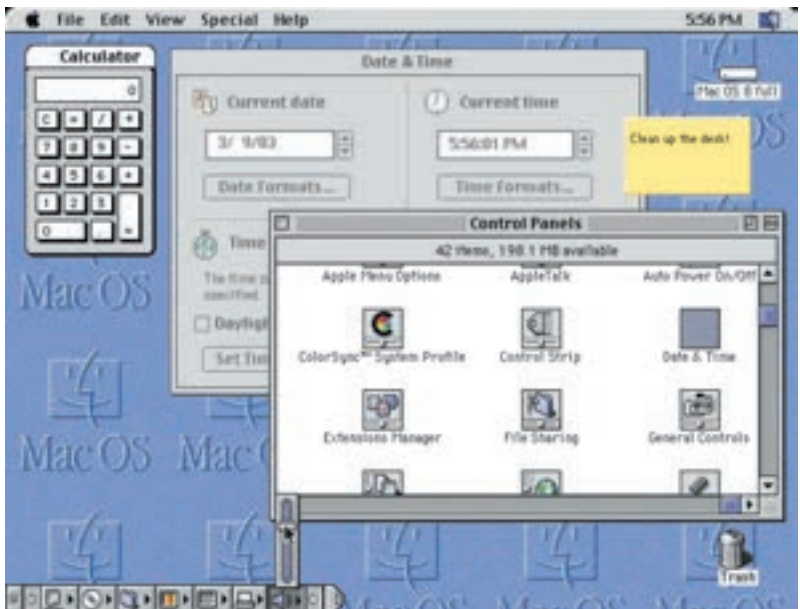

Mac OS 8 included a major revamp since System 7 and was released in 1997