

going to your “Resources” group and then opening “DigitViewController.xib”. Doing this will result in the firing of Interface Builder

A point to note is that though the file extension is called xib, it is a very recent change, it was originally called “nib” and even now most of the Apple’s Documentation refer it that way only. Hence even in this guide we will be referring to them as NIB files.


Here you can experiment and add delete visual elements. The interface builder lets you do what you can technically do via code also but in a far more intuitive way. For example instead of writing the following

```
UIButton *digitButton = [[UIButton alloc]
initWithFrame:aRect];
```

you can simply drag and drop a button, and also easily modify its shape, size, color and other properties from the interface builder. To change the attribute of any object, select the object and then press [Command] + [1] or go to **Tools > Inspector** to launch the attribute window. The main graphical layout of your application is shown in a window called the “View Window.”

The UIButton is part of the “Cocoa Touch” objects, the GUI layer of your code. Each object that you drag to your frame creates an instance of that class in your application. In case you want to label the button, you can either modify its text property or you can drag and drop a “Label” Object into the frame (the View Window). To modify its text just double-click and edit. You can always drag and drop it around the view window to position it where you want.

If at this point you are getting really impatient, you can select Save from the File menu of the interface builder. In Xcode, go to **Build > Build and Run**, and then if there are no errors in your code (there should be none till this point), the

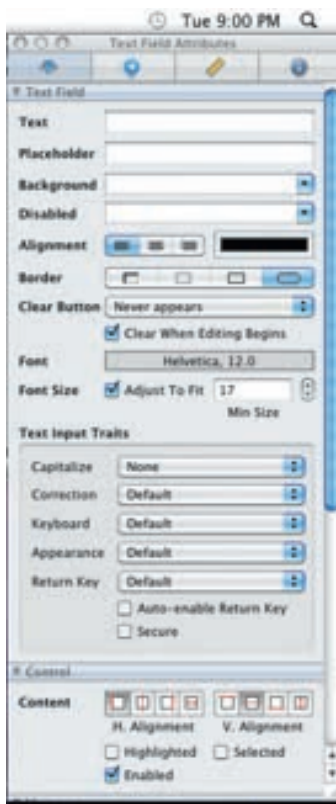

Tweak your GUI to your heart's content.