


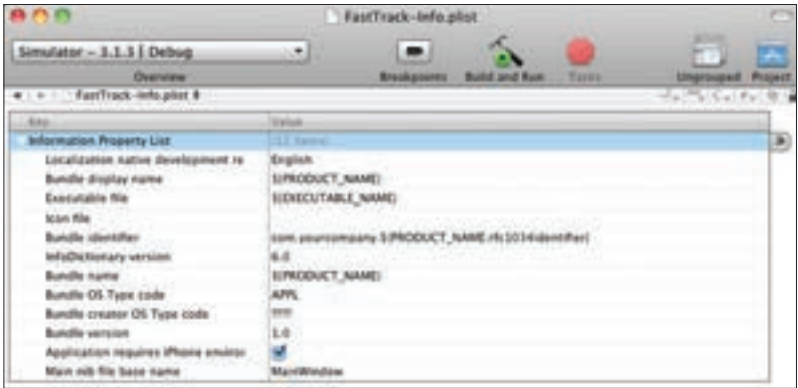

The Property List Editor Interface in Xcode

Applications/<app_id>/tmp/ on a real iPhone. To return the path of a particular file stored in the tmp folder, you can use the following command:

```
NSString *fileName = [[self tempPath] stringByAppendingPathComponent:@"digit.txt"];
```

8.4 Storing structured data

To store structured data (data categorised by key-value pairs) on an iPhone, you need to use Property Lists. These lists are stored as XML files and can be transferred across file systems, different iPhones and even across platforms or networks. Lets see how we can create and add a Property list on the Resources folder of your application using Xcode and then populate it with the built-in Property List Editor. We will also see how to programmatically retrieve values from the property list during runtime, make some changes to it and then write it back to another property list file.

8.5 Creating a property list

Right on the project that we created previously in this chapter and click on **Add > New File**. In the left pane, select **Other** and then choose the **Property List** template from the right pane. Click on **Next** and name it **temp.list**. Now, you can populate it from the editor that comes on the screen.

Next, we need to change the **viewDidLoad** method from the previous code as:

```
- (void)viewDidLoad {
    //filename
```